ORIN



Reinforcing Bar Couplers


For The Construction Industry

OVERVIEW

We Are Construction And Contract Managing Company. Our Company Vision Is To Transform Structures Worldwide With TMT Joint Materiala For a Sustainable Tomorrow

WHAT IS MECHANICAL REBAR ?

Mechanical Rebar Couplers Provide A Strong And Reliable Connection Between Two Steel Reinforcement Bars In Concrete Structures. This Innovative System Ensures Perfect Alignment And Secure Joining, Meeting All Required Splice Standards.
It Enhances Construction Quality, Saves Time, And Reduces Material Waste—making It Ideal For Modern, Sustainable Building Practices.

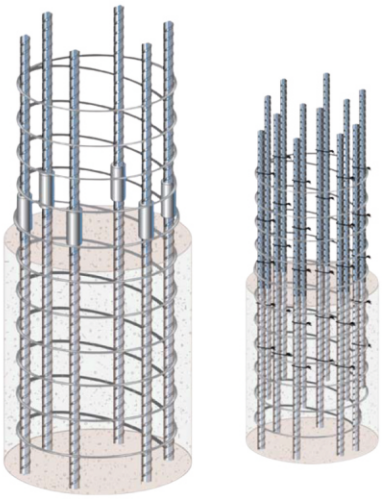





BENEFITS

- Cost Saving Due To Reduction In Steel Consumption And Labor Cost.
- Quick And Easy Installation.
- Shortens Project Timeline.
- Improvement In Concrete Flow And Consolidation.
- Higher Ultimate Tensil Strength Than That Of Parent Tebar







OUR PROJECT


Prism Luxuria


Anthem Arica


Vishwa 99


swaminarayan hills


Antaara Sky


Eden Classio


Eden Heaven


Shivanta Signature


Siddheshwar Hill


Tapi Bus. World


Lotus Valley


Swastham Square


Ananta Orbis


ATC


KBC 2


Rebar Roll Parallel Thread




Rebar Cold Forging Machine




Parallel Threaded Couplers



1. Peeling
The ribbing at the end of there bar is peeled



2. Threading
The peeled end of the rebar is rolled thread as per stand ISO metric



3. Mechanical Splicing
Coupler can be used to connect the two rebard

Cold Couplers



1. Forging
The reinforcing bar is enlarged by cold forging process, thus increasing its diameter



2. Threading
Standard ISO metric threads are then cut on to the enlarged end



3. Mechanical Splicing
Finally splice the rebar by threaded Vruddhi cold forged coupler

◆ Parallel Threaded Couplers


TMT Rebar Size	Coupler O.D.(mm)	Coupler Length(mm)	Coupler Pitch(mm)	Coupler Weight(kg)
16	25	42	2.5	0.080
20	32	52	2.5	0.180
25	40	62	3.0	0.350
32	50	78	3.0	0.670
36	60	86	3.0	1.170
40	65	96	4.0	1.350

◆ Cold Forged Couplers

TMT Rebar Size	Coupler O.D.(mm)	Coupler Length(mm)	Coupler Pitch(mm)	Coupler Weight(kg)
16	25	42	2.5	0.070
20	32	52	2.5	0.160
25	40	62	3.0	0.300
32	50	78	3.0	0.600
36	60	86	3.0	1.100
40	65	96	4.0	1.250

MECHANICAL REBAR COUPLERS



COST COMPARISON: LAPPING V/S COUPLER

Steel (D)Si Dia m ze in m	Overlap Length in Mt. (50D)	Wt. of Steel for Lapping Kg. in	Cost overlapped TMT bar(Steel Rate Rs.56 per KG.)	Cost of Coupler in Rs.	Cost of 2 Thread with Roll Threading in Rs.	Total Cost of Joint using Coupler in Rs.	Saving using Coupler in Rs.
40	2.00	19.84	1111.04	183	50	233	878.04
36	1.80	14.46	809.76	133	45	178	631.76
32	1.60	10.16	568.96	90	35	125	443.96
25	1.25	4.84	271.04	48	32	80	191.04
20	1.00	2.48	138.88	30	30	60	78.88
16	0.80	1.27	71.12	20	20	40	31.12

TERMS AND CONDITIONS

- GST Extra 18% Wil be applied on Coupler
- Coupler Will be Supplied according to your Demand
- Mobilization time for Material 5-10 Days
- Labour for Steel loading-unloading Pearson no 2 Party Scope
- Coupler Rate are Change According Raw Material Rate And Market Rate



Steelux Industries

+91 8849001529 / +91 99793 05461

steelux7227@gmail.com

5, Laxman Nagar Industries, Besides Daimond Nagar,
Laskana, Surat-395006